

TECHNICAL CARD



LED Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

VIDEX-FLOOD-LED-F3-30W-5K

INDEX: VLE-F3-0305B



Ra ≥ 80

ON/OFF
20 000

IK07



30 000 h



Free



Not Dimmable



-20°C +50°C



No Flicker



CCT 5000K



Free



IP65

WARRANTY 2 YEARS



NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Neutrnalno bela / Neutrnalno bijela / Neutralweiß / Alb neutru / Neutrnalus balta / Neitrāls balta / Neutraalne valge / Неутрално бяла / Bianco neutro.

General parameters

Light source or containing product	Light source
Control gear replaceable	no
Light source replaceable	no

Type of light source

Energy class of the light source	F
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	DLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

Electrical parameters

On-mode power (Pon)	30 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	20 cm
Rated current	150 mA
Input interface	Free wire ends
Electric shock protection class	I
Displacement factor (cos φ1)	0.9
Survival factor	0.9
Energy consumption in on-mode of the light source (kWh/1000h)	30

Photometric parameters

Luminous flux	2850 Lm
Useful luminous flux (Φuse)	2400 Lm

INDEX: VLE-F3-0305B

Correlated color temperature	5000K (neutral white)
Peak luminous intensity	1200 cd
Beam angle	110°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0
The lumen maintenance factor	≥96%
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	outdoor use
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Vertical adjustment range	180°
Place of installation	Ceiling, Flat surface, Wall
Place of application	outdoor
Impact protection	IK07
Housing colour	Black
Diffuser material	Polycarbonate (PC)

Minimum distance from the illuminated object	0.5 m
Ultraviolet radiation	no
Motion sensor	no
Operating temperature range	-20° +50°C
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions

EAN	5904405542446
In the package	1 pc.
Height	100 mm
Outer box	20 pcs.
Width	141 mm
Depth	33 mm
Unit nett weight	230g

Signs marking goods

Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------


VIDEX[®]

VIDEX-FLOOD-LED-F3-30W-5K

INDEX: VLE-F3-0305B



INDEX: VLE-F3-0305B

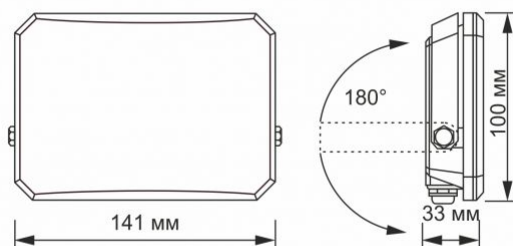

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



Minimum distance from the illuminated object



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



Ra > 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



IK07

— The product withstands a medium impact (e.g., from a blunt object)



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20°C +50°C

— Operating temperatures range



No Flicker

— The flickering of the light does not exceed the permissible level



CCT 5000K

— Colour consistency in MacAdam ellipses (SDCM)



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture.
The product has full protection against dust and water jets from all directions