


## TECHNICAL CARD



LED Frame Panel



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

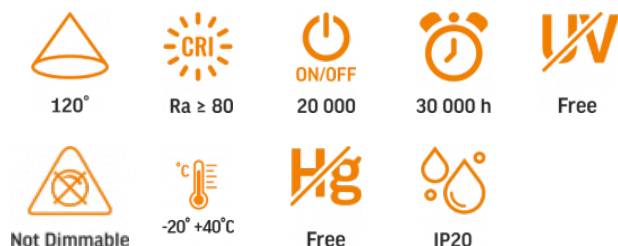**INDEX: VLE-PA404W**

**WARRANTY 3 YEARS**
**NEUTRAL WHITE**


Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

**General parameters**

<b>Light source or containing product</b>	Containing product
<b>Control gear replaceable</b>	by the producer
<b>Light source replaceable</b>	no

**Type of light source**

<b>Dimmable</b>	no
<b>Technology</b>	LED
<b>Energy efficiency class of the contained light source</b>	E

**Electrical parameters**

<b>Rated voltage, frequency</b>	AC 175-265 V, 50/60 Hz
<b>Cable length</b>	75 cm

<b>Rated current</b>	300 mA
<b>Input interface</b>	Free wire ends
<b>Electric shock protection class</b>	II

**Photometric parameters**

<b>Correlated color temperature</b>	4000K (neutral white)
<b>Useful luminous flux of the contained light source (Φ<sub>use</sub>)</b>	4500 Lm
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime</b>	30000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)

**Additional information**



<b>Place of installation</b>	Armstrong ceiling, Ceiling
<b>Place of application</b>	indoor
<b>Housing colour</b>	White
<b>Diffuser material</b>	Plastic
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum


**VIDEX®**

VIDEX-FRAME-PANEL-LED-40W-PA404W-NW

**INDEX: VLE-PA404W****Dimensions**

<b>EAN</b>	5904405541029
<b>Height</b>	591 mm
<b>Depth</b>	11 mm
<b>Width</b>	591 mm
<b>Outer box</b>	10 pcs.

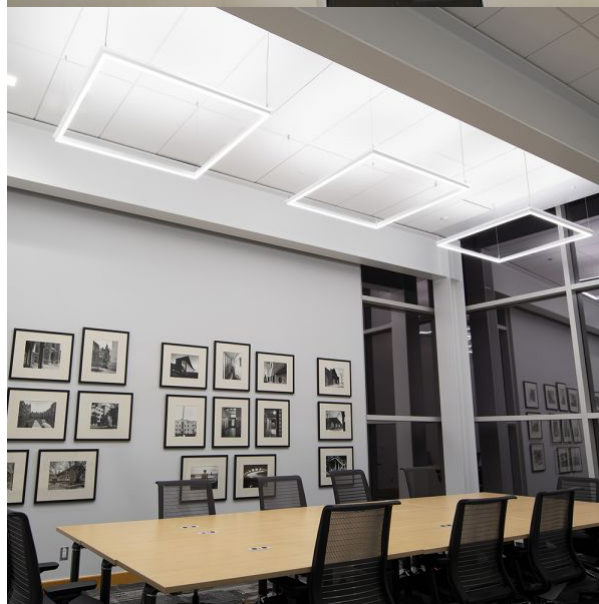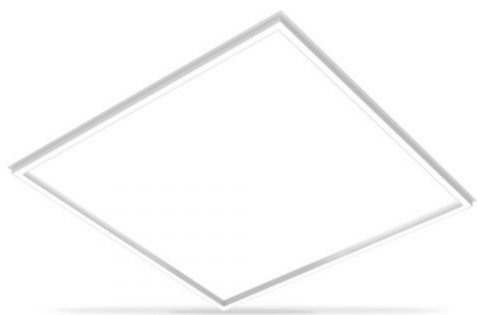

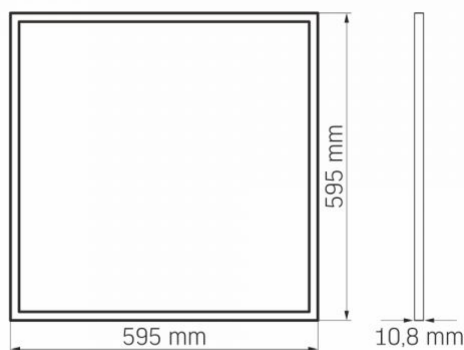**INDEX: VLE-PA404W**


We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,

30-732 Krakow, Poland.



The product must be used indoors



Class of protection against electric shock II - provided not only by basic insulation but also by double or reinforced insulation



120°

— Rated beam angle



Ra > 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Not Dimmable

— The product is incompatible with light regulators



-20° +40°C

— Operating temperatures range



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture