

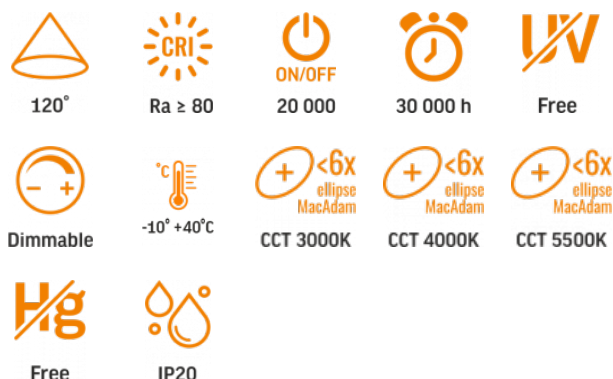
TECHNICAL CARD



LED Rechargeable Desk Lamp



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VLE-TF18W**WARRANTY 2 YEARS****General parameters**

Control gear replaceable	no
Light source replaceable	no

Type of light source

Dimmable	3-step
Directional (DLS) or non-directional (NDLS) light source	-
Connected light source (cls)	-
Color-tunable light source	yes
Mains (MLS) or non-mains (NMLS) light source	-
High luminance light source	-
Anti-glare shield	-
Technology	LED

Electrical parameters

On-mode power (Pon)	3 W
---------------------	-----

Rated voltage, frequency	DC 5 V
Rated current	2 A
Input interface	USB-C
Electric shock protection class	III
Displacement factor (cos φ1)	-
Survival factor	1

Photometric parameters

Luminous flux	300 Lm
Correlated color temperature	5500K (cold white), 4000K (neutral white), 3000K (warm white)
Beam angle	120°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Chromaticity coordinates (x)	0.38
Chromaticity coordinates (y)	0.38
R9 colour rendering index value	-
The lumen maintenance factor	-
Flicker metric (Pst LM)	-
Stroboscopic effect metric (SVM)	-
Colour consistency in MacAdam ellipses (SDCM)	<6 (3000K), <6 (4000K), <6 (5500K)

Additional information

Place of installation	Desk
-----------------------	------

INDEX: VLE-TF18W

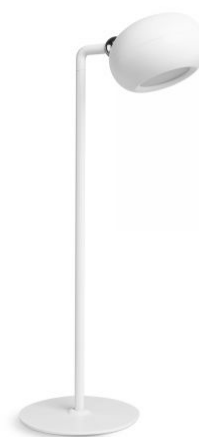
Place of application	indoor
Housing colour	White
Ultraviolet radiation	no
Operating temperature range	-10° +40°C
Battery type	LiFePO4
Battery capacity	1800 mAh
Battery replaceable	no
Mercury content	Does not contain
Ingress protection	IP20
Housing material	PC, PP, PS

Dimensions

EAN	5904405542545
Height	356 mm
Depth	120 mm
In the package	1 pc.
Outer box	20 pcs.
Width	120 mm

Signs marking goods

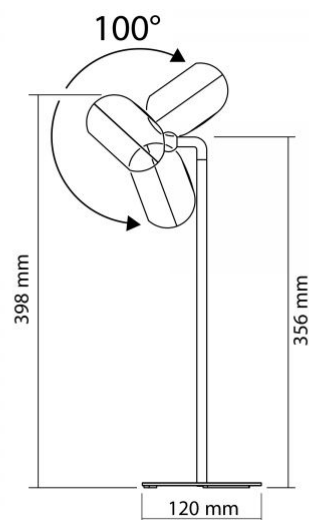
Packaging marking	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------



VIDEX®

VIDEX VLE-TF18W White

INDEX: VLE-TF18W

VIDEX®**VIDEX VLE-TF18W White****INDEX: VLE-TF18W**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VLE-TF18W



The product must be used indoors



Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



120°

— Rated beam angle



Ra > 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



30 000 h

— Nominal lifetime (hours)



Free

— The product does not emit ultraviolet light



Dimmable

— The product has 3-level brightness adjustment



-10° + 40°C

— Operating temperatures range



CCT 3000K

— Colour consistency in MacAdam ellipses (SDCM)



CCT 4000K

— Colour consistency in MacAdam ellipses (SDCM)



CCT 5500K

— Colour consistency in MacAdam ellipses (SDCM)



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture