

VIDEX®

VIDEX-E27-A60-12W-NW

INDEX: VLE-A60e-12274

TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



240°



Ra ≥ 80



20 000 h

ON/OFF
20 000

Not Dimmable



Free



IP20

WARRANTY 2 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

Type of light source

| | |
|---|---|
| Energy class of the light source | F |
|---|---|

| | |
|-----------------|----|
| Dimmable | no |
|-----------------|----|

Electrical parameters

| | |
|----------------------------|------|
| On-mode power (Pon) | 12 W |
|----------------------------|------|

| | |
|---------------------------------|------------------------|
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
|---------------------------------|------------------------|

| | |
|----------------------|--------|
| Rated current | 104 mA |
|----------------------|--------|

Photometric parameters

| | |
|---|---------|
| Useful luminous flux of the light source (Φ_{use}) | 1180 Lm |
|---|---------|

| | |
|-------------------------------------|-----------------------|
| Correlated color temperature | 4000K (neutral white) |
|-------------------------------------|-----------------------|

| | |
|-------------------|------|
| Beam angle | 240° |
|-------------------|------|

| | |
|------------------------------------|---------|
| Color rendering index (CRI) | Ra > 80 |
|------------------------------------|---------|

VIDEX-E27-A60-12W-NW

INDEX: VLE-A60e-12274

| | |
|-----------------|---------|
| Lifetime | 20000 h |
|-----------------|---------|

| | |
|----------------------|-------|
| On/Off cycles | 20000 |
|----------------------|-------|

| | |
|---|--------------------|
| Useful luminous flux of the light source | in a sphere (360°) |
|---|--------------------|

Additional information

| | |
|-----------------------------|--------|
| Place of application | indoor |
|-----------------------------|--------|

| | |
|------------------------------------|------------|
| Operating temperature range | -20° +40°C |
|------------------------------------|------------|

| | |
|------------------------|------------------|
| Mercury content | Does not contain |
|------------------------|------------------|

| | |
|---------------------------|------|
| Ingress protection | IP20 |
|---------------------------|------|

Dimensions

| | |
|------------|---------------|
| EAN | 5904405540282 |
|------------|---------------|

| | |
|---------------|--------|
| Height | 118 mm |
|---------------|--------|

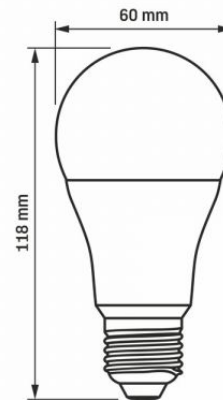
| | |
|--------------|-------|
| Depth | 60 mm |
|--------------|-------|

| | |
|--------------|-------|
| Width | 60 mm |
|--------------|-------|

| | |
|------------------|---------|
| Outer box | 20 pcs. |
|------------------|---------|

VIDEX®

VIDEX-E27-A60-12W-NW

INDEX: VLE-A60e-12274

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

