

## TECHNICAL CARD



LED Portable Flashlight

## INDEX: VLF-A376



## WARRANTY 3 YEARS

### General parameters

Operation mode	TURBO, HIGH, LOW, MOON, STROBE, RED HIGH, RED LOW, RED FLASH
Light source replaceable	no
Battery Warranty	1 year

### Type of light source

Dimmable	no
Technology	LED

### Electrical parameters

On-mode power (Pon)	20 W
Input interface	USB-C

### Photometric parameters

Useful luminous flux of the contained light source (Φuse)	3600 Lm
Correlated color temperature	5000K (neutral white), Red
Peak luminous intensity	21440 cd

### Additional information

Housing colour	Black
Fall protection	1 m
Operating temperature range	-20° +40°C
Battery type	Li-ion 21700, Li-ion 18650
Battery voltage	3.7 V
Battery capacity	4000 mAh
Battery indicator	4 level
Battery replaceable	yes
Mercury content	Does not contain
Ingress protection	IP68
Housing material	Aviation anodized aluminum

### Dimensions

EAN	4820246487177
Height	152 mm
Depth	29 mm
In the package	1 pc.
Outer box	20 pcs.
Width	40 mm
Unit nett weight	135g

### Signs marking goods


Packaging marking	CE, Utilization
-------------------	-----------------

# VIDEX®

VIDEX VLF-A376 3600Lm 5000K

INDEX: VLF-A376

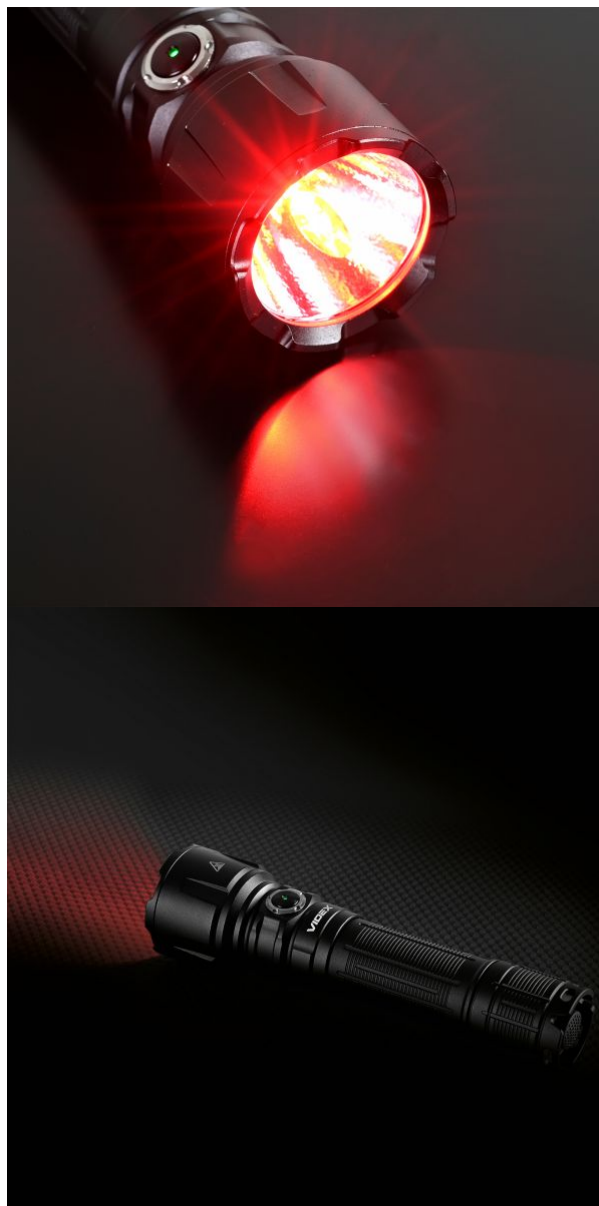

**VIDEX<sup>®</sup>****VIDEX VLF-A376 3600Lm 5000K****INDEX: VLF-A376**

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

## INDEX: VLF-A376



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



— The protection is effective in case of a fall from a height of up to 1 meter



— The product is incompatible with light regulators



— Operating temperatures range



— The product does not contain mercury



— Class of protection against dust and moisture.  
The product has full protection against dust and prolonged immersion in water at a depth of more than 1 meter