

TECHNICAL CARD



LED Street Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



90×130°



Ra ≥ 80



30 000 h

ON/OFF
20 000

IK07



Not Dimmable



Free



IP65

WARRANTY 3 YEARS

NEUTRAL WHITE



4000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálina biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Control gear replaceable -

Light source replaceable no

Type of light source

Energy class of the light source E

Dimmable no

Electrical parameters

On-mode power (P_{on}) 50 W

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Cable length 30 cm

Rated current 240 mA

Input interface Free wire ends

VIDEX-STREET-LED-LEYA-50W-NW

INDEX: VLE-SLe14-504

Electric shock protection class I

Photometric parameters

Useful luminous flux of the light source (Φ_{use}) 5000 Lm

Correlated color temperature 4000K (neutral white)

Peak luminous intensity 3100 cd

Beam angle 90 × 130°

Color rendering index (CRI) Ra > 80

Lifetime 30000 h

On/Off cycles 20000

Useful luminous flux of the light source reference in a wide cone (120°)

Additional information

Vertical adjustment range 200°

Place of installation Pillar, Wall

Place of application outdoor

Housing colour Gray

Impact protection IK07

Minimum distance from the illuminated object 0.5 m

Diffuser material PC

Operating temperature range -20° +50°C

Mercury content Does not contain

Ingress protection IP65

Housing material Aluminum alloy

VIDEX[®]

VIDEX-STREET-LED-LEYA-50W-NW

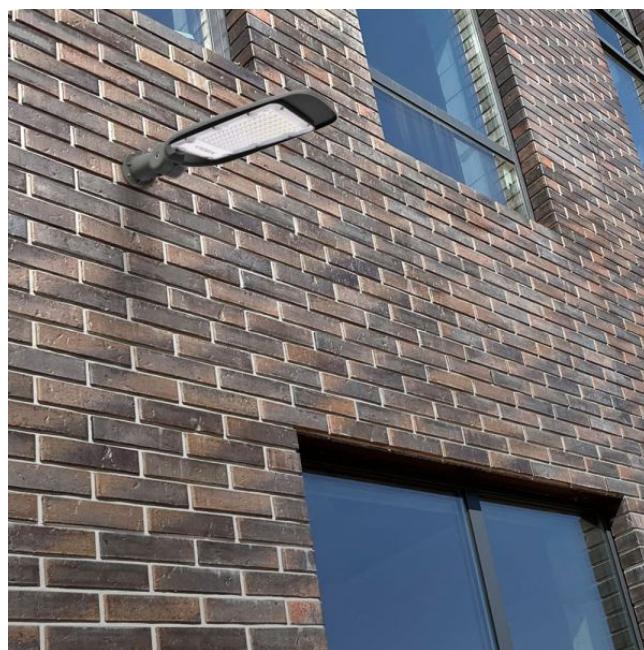
INDEX: VLE-SLe14-504**Dimensions**

EAN	5904405541074
Height	487 mm
Width	151 mm
Depth	88 mm
Outer box	10 pcs.



VIDEX[®]

VIDEX-STREET-LED-LEYA-50W-NW

INDEX: VLE-SLe14-504

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro Opt Sp. z o.o., Handlowa 23, 05-120 Legionowo, Poland.

