

## TECHNICAL CARD



LED Batten Light




Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.




# VIDEX®

## VIDEX 36W 0.6M 5000K 4000Lm Black

### INDEX: VLE-BN-36065B

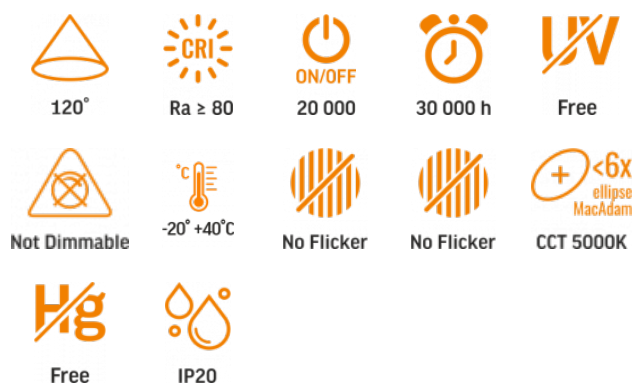

### WARRANTY 3 YEARS

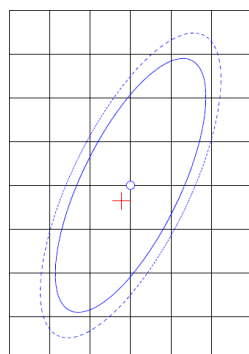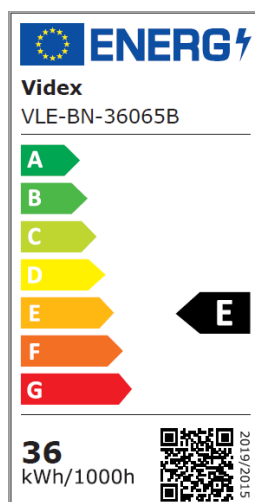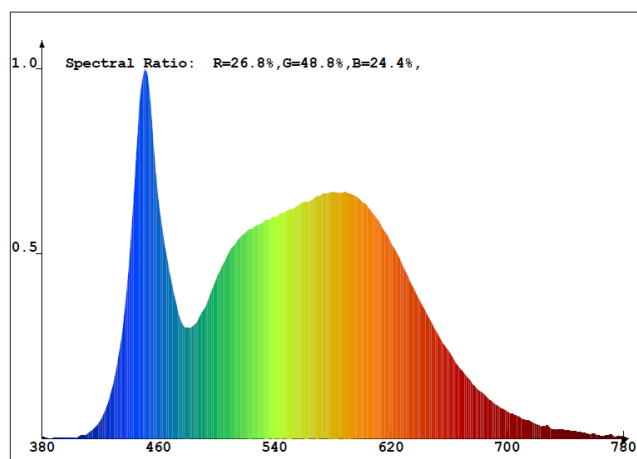

NEUTRAL WHITE  
5000K

Neutral White / Neutralny biaty / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutralus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

### General parameters

Light source or containing product	Light source
Control gear replaceable	by the producer
Light source replaceable	by the producer

### Type of light source

Energy class of the light source	E
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	NDLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS
High luminance light source	No
Anti-glare shield	No
Technology	LED

### Electrical parameters

On-mode power (Pon)	36 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Rated current	193 mA
Input interface	Free wire ends

### INDEX: VLE-BN-36065B

<b>Electric shock protection class</b>	I
<b>Displacement factor (cos φ1)</b>	0.9
<b>Survival factor</b>	0.9

### Photometric parameters

<b>Useful luminous flux (Φuse)</b>	4000 Lm
<b>Correlated color temperature</b>	5000K (neutral white)
<b>Beam angle</b>	120°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	30000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
<b>Chromaticity coordinates (x)</b>	0.35
<b>Chromaticity coordinates (y)</b>	0.36
<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥96%
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	≤0.4
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (5000K)
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

### Additional information

<b>Place of installation</b>	Ceiling, Wall
<b>Place of application</b>	indoor

<b>Housing colour</b>	Black
<b>Diffuser material</b>	Plastic
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Ultraviolet radiation</b>	no
<b>Operating temperature range</b>	-20° +40°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20
<b>Housing material</b>	Aluminum

### Dimensions

<b>EAN</b>	4820246484572
<b>In the package</b>	1 pc.
<b>Height</b>	45 mm
<b>Outer box</b>	25 pcs.
<b>Width</b>	60 mm
<b>Depth</b>	600 mm
<b>Unit nett weight</b>	366g

### Signs marking goods

<b>Packaging marking</b>	Recycling of waste, CE, Utilization
--------------------------	-------------------------------------


**VIDEX®**

VIDEX 36W 0.6M 5000K 4000Lm Black

**INDEX: VLE-BN-36065B**

**VIDEX®**


VIDEX 36W 0.6M 5000K 4000Lm Black

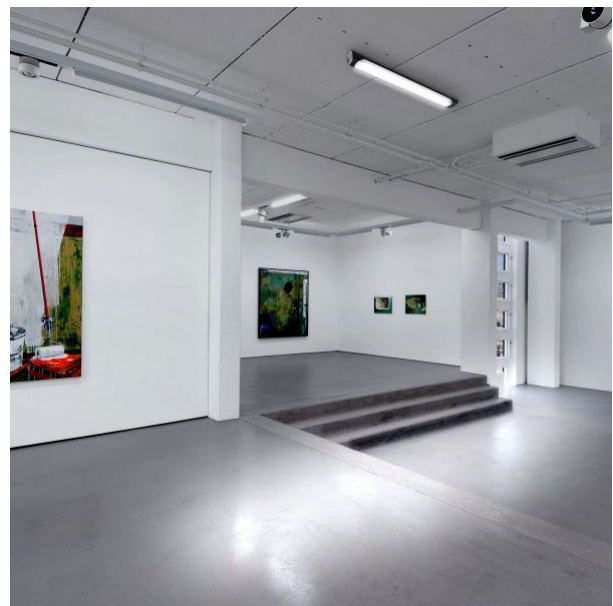**INDEX: VLE-BN-36065B**

# VIDEX®

## VIDEX 36W 0.6M 5000K 4000Lm Black

### INDEX: VLE-BN-36065B

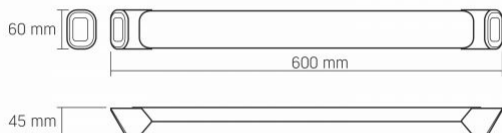

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.

-  The product must be used indoors
-  Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network
-  Minimum distance from the illuminated object
-  The product can be installed and used in/on normally flammable surfaces
-  Waste recycling after the end of the product's service life
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles
-  — Nominal lifetime (hours)
-  — The product does not emit ultraviolet light
-  — The product is incompatible with light regulators
-  — Operating temperatures range
-  — The flickering of the light does not exceed the permissible level
-  — The product has minimal flickering, which should not cause discomfort or danger
-  — Colour consistency in MacAdam ellipses (SDCM)
-  — The product does not contain mercury
-  — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture