

TECHNICAL CARD



Led Fixture Architectural



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®



IK07



-25° +50°C



Free



IP54

WARRANTY 2 YEARS

General parameters

Light source replaceable end user

Type of light source

Technology LED

Electrical parameters

Rated voltage, frequency AC 220-240 V, 50/60 Hz

Input interface Terminal block

Electric shock protection class I

Additional information

Place of installation Wall

Place of application indoor, outdoor

Impact protection IK07

Housing colour Black

Diffuser material Polycarbonate (PC)

Operating temperature range -25° +50°C

Suitable for installation in normally flammable surfaces yes

Mercury content Does not contain

VIDEX VL-AR092B

INDEX: VL-AR092B

Ingress protection IP54

Housing material Aluminum

Dimensions

EAN 4820246485968

In the package 1 pc.

Outer box 20 pcs.

Height 305 mm

Width 60 mm

Depth 80 mm

Unit nett weight 540g

Signs marking goods

Packaging marking CE, Utilization




VIDEX[®]

VIDEX VL-AR092B

INDEX: VL-AR092B

INDEX: VL-AR092B

30-732 Krakow, Poland.

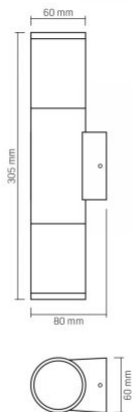

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,



The product must be used indoors



The product must be used outdoors



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



The product can be installed and used in/on normally flammable surfaces



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



The product withstands a medium impact (e.g., from a blunt object)



Operating temperatures range



The product does not contain mercury



Class of protection against dust and moisture. The product is protected against the ingress of water and dust particles into the housing