

TECHNICAL CARD




LED Solar Floodlight



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

INDEX: VLE-FSO-205-S

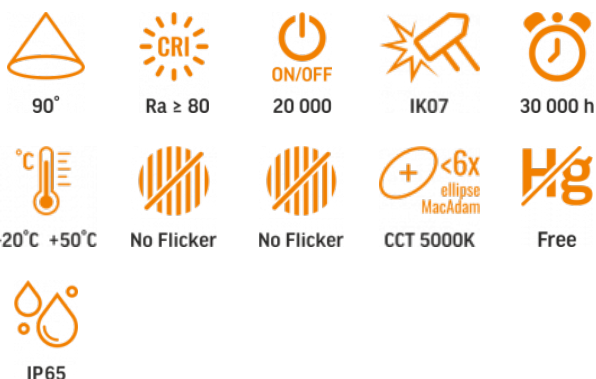

WARRANTY 2 YEARS

NEUTRAL WHITE



5000K

Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutralno bijela / Neutralweiß / Alb neutru / Neutraus balta / Neitrāls balta / Neutraalne valge / Нейтрално бяла / Bianco neutro.

General parameters

Light source replaceable no

Type of light source

Dimmable remote controller

Technology LED

Electrical parameters

Cable length 1 m

Electric shock protection class III

Displacement factor (cos φ1) -

Survival factor 1

Photometric parameters

Luminous flux	600 Lm
Correlated color temperature	5000K (neutral white)
Beam angle	90°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime (L70B50)	30000 h
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0
Flicker metric (Pst LM)	≤1
Stroboscopic effect metric (SVM)	≤0.4
Colour consistency in MacAdam ellipses (SDCM)	<6 (5000K)
CRI Min	Ra 80
CRI Max	Ra 88

Additional information

Battery power	16 Wh
Vertical adjustment range	180°
Place of installation	Flat surface, Wall
Place of application	outdoor
Impact protection	IK07
Housing colour	Gray
Diffuser material	Polycarbonate (PC)
Minimum distance from the illuminated object	0.5 m

INDEX: VLE-FSO-205-S

Motion sensor	yes
Sensor type	Microwave
Sensor detection distance	2 - 8 m
Operating temperature range	-20° +50°C
Battery voltage	3.2 V
Battery type	LiFePO4
Battery capacity	5000 mAh
Battery replaceable	no
Suitable for installation in normally flammable surfaces	yes
Mercury content	Does not contain
Ingress protection	IP65
Housing material	Aluminum alloy

Dimensions

EAN	5904405542354
In the package	1 pc.
Outer box	5 pcs.
Height	145 mm
Width	128 mm
Depth	42 mm
Unit nett weight	1780g

Signs marking goods




Packaging marking	CE, Utilization
--------------------------	-----------------



VIDEX®

VIDEX-FLOOD-LED-SOLAR-GELIO-SENSOR-20W-NW



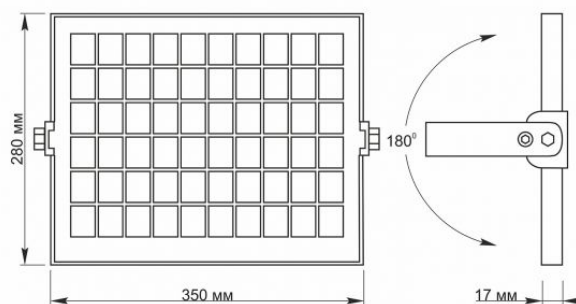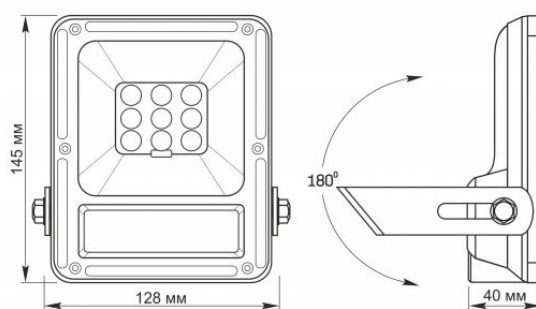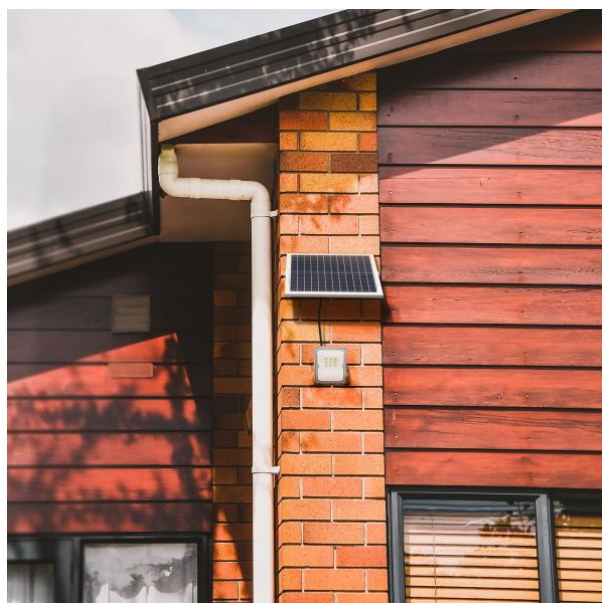














INDEX: VLE-FSO-205-S



We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

INDEX: VLE-FSO-205-S

-  The product must be used outdoors
-  Class III protection against electric shock - ensured by supplying a specific product with a safe very low voltage (SELV) without the risk of creating a voltage above safe levels
-  Minimum distance from the illuminated object
-  The product can be installed and used in/on normally flammable surfaces
-  The product meets the requirements of EU directives
-  It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste
-  — Rated beam angle
-  — Ra > 80 - color rendering index
-  — Rated On/off cycles
-  — The product withstands a medium impact (e.g., from a blunt object)
-  — Nominal lifetime (hours)
-  — Operating temperatures range
-  — The flickering of the light does not exceed the permissible level
-  — The product has minimal flickering, which should not cause discomfort or danger
-  — Colour consistency in MacAdam ellipses (SDCM)
-  — The product does not contain mercury
-  — Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions