

VIDEX®

VIDEX-E14-C35-6W-FIL-AMBER-WW

INDEX: VLE-C35FA-06142

TECHNICAL CARD




LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

VIDEX®

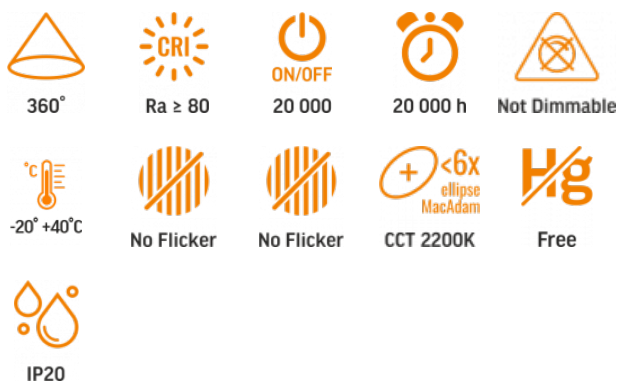VIDEX-E14-C35-6W-FIL-AMBER-WW
INDEX: VLE-C35FA-06142


WARRANTY 3 YEARS

WARM WHITE

2200K

Warm White / Ciepła biel / Tepla bila / Blanc chaud / Tepla biela / Warm wit / Meleg feher / Topla bela / Topla bijela / Warmweiß / Alb cald / Šiltai balta / Silti balta / Soe valge / Тепло бяла / Bianco caldo.

General parameters

Light source or containing product Light source

Type of light source

| | |
|---|------|
| Energy class of the light source | E |
| Dimmable | no |
| Directional (DLS) or non-directional (NDLS) light source | NDLS |
| Connected light source (cls) | no |
| Color-tunable light source | no |
| Mains (MLS) or non-mains (NMLS) light source | MLS |
| High luminance light source | No |
| Anti-glare shield | No |
| Technology | LED |

Electrical parameters

| | |
|--|------------------------|
| On-mode power (Pon) | 6 W |
| Rated voltage, frequency | AC 220-240 V, 50/60 Hz |
| Rated current | 52 mA |
| Displacement factor (cos φ1) | 0.5 |
| Survival factor | 0.9 |
| Energy consumption in on-mode of the light source (kWh/1000h) | 6 |

Photometric parameters

| | |
|---|--------------------|
| Useful luminous flux (Φuse) | 680 Lm |
| Correlated color temperature | 2200K (warm white) |
| Beam angle | 360° |
| Color rendering index (CRI) | Ra > 80 |
| On/Off cycles | 20000 |
| Lifetime (L70B50) | 20000 h |
| Useful luminous flux of the light source reference | in a sphere (360°) |
| Chromaticity coordinates (x) | 0.49 |
| Chromaticity coordinates (y) | 0.43 |
| R9 colour rendering index value | >0 |
| The lumen maintenance factor | ≥94.8% |
| Flicker metric (Pst LM) | ≤1 |
| Stroboscopic effect metric (SVM) | ≤0.4 |
| Colour consistency in MacAdam ellipses (SDCM) | <6 (2200K) |

VIDEX®

VIDEX-E14-C35-6W-FIL-AMBER-WW

INDEX: VLE-C35FA-06142

| | |
|----------------|-------|
| CRI Min | Ra 80 |
| CRI Max | Ra 88 |

Additional information

| | |
|------------------------------------|------------------|
| Place of application | indoor |
| Operating temperature range | -20° +40°C |
| Mercury content | Does not contain |
| Ingress protection | IP20 |

Dimensions

| | |
|-------------------------|---------------|
| EAN | 5904405540138 |
| In the package | 1 pc. |
| Height | 98 mm |
| Outer box | 20 pcs. |
| Width | 35 mm |
| Depth | 35 mm |
| Unit nett weight | 14g |

Signs marking goods


| | |
|--------------------------|--|
| Packaging marking | Recycling of waste, CE, Not suitable for use under moisture, Utilization |
|--------------------------|--|



VIDEX®

VIDEX-E14-C35-6W-FIL-AMBER-WW

INDEX: VLE-C35FA-06142

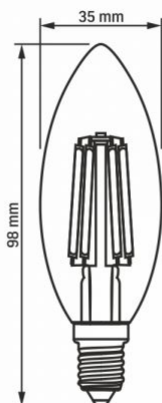

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,
30-732 Krakow, Poland.

| | |
|---|---|
|  | The product must be used indoors |
|  | Waste recycling after the end of the product's service life |
|  | The product meets the requirements of EU directives |
|  | Not suitable for use under moisture |
|  | It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste |
|  | — Rated beam angle |
|  | — Ra > 80 – color rendering index |
|  | — Rated On/off cycles |
|  | — Nominal lifetime (hours) |
|  | — The product is incompatible with light regulators |
|  | — Operating temperatures range |
|  | — The flickering of the light does not exceed the permissible level |
|  | — The product has minimal flickering, which should not cause discomfort or danger |
|  | — Colour consistency in MacAdam ellipses (SDCM) |
|  | — The product does not contain mercury |
|  | — Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture |