


## TECHNICAL CARD



LED Bulb



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

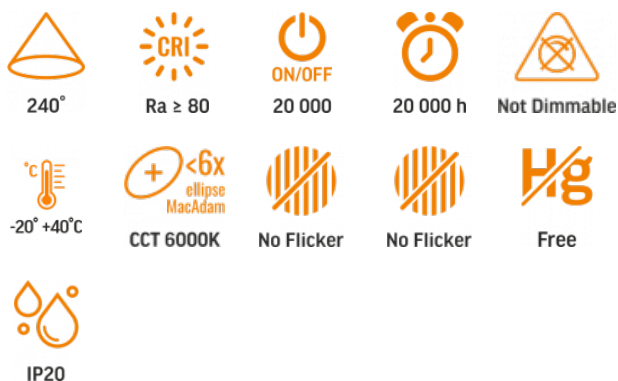

## WARRANTY 2 YEARS



Cold White / Zimna biel / Studena bila / Blanc froid / Studená biela / Koud wit / Hideg feher / Hladno bela / Hladno bijela / Kaltweiß / Alb rece / Šalta balta / Auksti balta / Kūlm valge.

## General parameters

**Light source or containing product** Light source

## Type of light source

<b>Energy class of the light source</b>	F
<b>Dimmable</b>	no
<b>Directional (DLS) or non-directional (NDLS) light source</b>	NDLS
<b>Connected light source (cls)</b>	no
<b>Color-tunable light source</b>	no
<b>Mains (MLS) or non-mains (NMLS) light source</b>	MLS
<b>High luminance light source</b>	No
<b>Anti-glare shield</b>	No
<b>Technology</b>	LED

## Electrical parameters

<b>On-mode power (Pon)</b>	12 W
<b>Rated voltage, frequency</b>	AC 220-240 V, 50/60 Hz
<b>Rated current</b>	104 mA
<b>Energy consumption in on-mode of the light source (kWh/1000h)</b>	12
<b>Displacement factor (cos φ1)</b>	0.7
<b>Survival factor</b>	0.9

## Photometric parameters

<b>Useful luminous flux (Φuse)</b>	1180 Lm
<b>Correlated color temperature</b>	6000K (cold white)
<b>Beam angle</b>	240°
<b>Color rendering index (CRI)</b>	Ra > 80
<b>On/Off cycles</b>	20000
<b>Lifetime (L70B50)</b>	20000 h
<b>Useful luminous flux of the light source reference</b>	in a sphere (360°)
<b>Chromaticity coordinates (x)</b>	0.31
<b>Chromaticity coordinates (y)</b>	0.33
<b>R9 colour rendering index value</b>	>0
<b>The lumen maintenance factor</b>	≥94.8%
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (6000K)
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	≤0.4
<b>CRI Min</b>	Ra 80

**VIDEX®****VIDEX-E27-A60-12W-CW****INDEX: VLE-A60e-12276****CRI Max**

Ra 88

**Additional information**


<b>Place of application</b>	indoor
<b>Operating temperature range</b>	-20° +40°C
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP20

**Dimensions**

<b>EAN</b>	5904405540299
<b>Height</b>	118 mm
<b>Depth</b>	60 mm
<b>Width</b>	60 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	20 pcs.
<b>Unit nett weight</b>	38g

**Signs marking goods**

<b>Packaging marking</b>	Recycling of waste, CE, Not suitable for use under moisture, Utilization
--------------------------	--

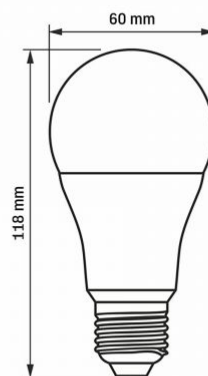

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used indoors



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



Not suitable for use under moisture



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



240°

— Rated beam angle



Ra ≥ 80

— Ra > 80 – color rendering index



20 000

— Rated On/off cycles



20 000 h

— Nominal lifetime (hours)



Not Dimmable

— The product is incompatible with light regulators



-20° ~ 40°C

— Operating temperatures range



CCT 6000K

— Colour consistency in MacAdam ellipses (SDCM)



No Flicker

— The flickering of the light does not exceed the permissible level



No Flicker

— The product has minimal flickering, which should not cause discomfort or danger



Free

— The product does not contain mercury



IP20

— Class of protection against dust and moisture. Protection against solid objects larger than 12 mm; no protection against moisture