


## TECHNICAL CARD



LED Street Light



Pursuant to the provisions of the WEEE Act, it is forbidden to put waste equipment marked with the symbol of a crossed out bin together with other waste. The user, wishing to get rid of electronic and electrical equipment, is obliged to return it to a waste equipment collection point. There are no hazardous components in the equipment that have a particularly negative impact on the environment and human health.

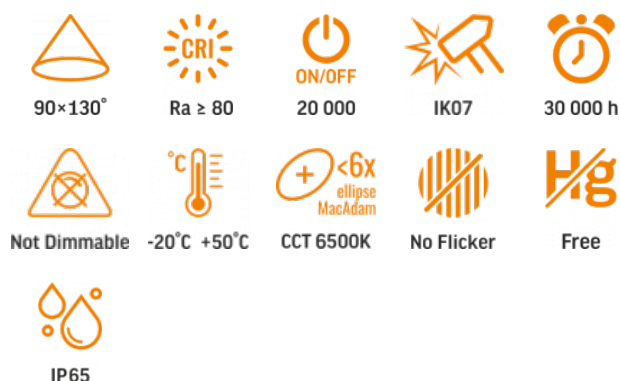**INDEX: VLE-SLE14-505**

**WARRANTY 3 YEARS**


Neutral White / Neutralny biały / Neutralni bila / Blanc neuter / Neutrálna biela / Neutraal wit / Semleges feher / Nevtralno bela / Neutrálno bijela / Neutralweiß / Alb neutru / Neutrus balta / Neitrāls balta / Neutraalne valge / Нейтрально бяла / Bianco neutro.

**General parameters**

Light source or containing product	Light source
Control gear replaceable	-
Light source replaceable	no

**Type of light source**

Energy class of the light source	E
Dimmable	no
Directional (DLS) or non-directional (NDLS) light source	DLS
Connected light source (cls)	no
Color-tunable light source	no
Mains (MLS) or non-mains (NMLS) light source	MLS

**Technology**

LED

**Electrical parameters**

On-mode power (Pon)	50 W
Rated voltage, frequency	AC 220-240 V, 50/60 Hz
Cable length	30 cm
Rated current	240 mA
Input interface	Free wire ends
Electric shock protection class	I
Energy consumption in on-mode of the light source (kWh/1000h)	50
Displacement factor (cos φ1)	0.9
Survival factor	0.9

**Photometric parameters**

Useful luminous flux (Φuse)	5000 Lm
Correlated color temperature	5000K (neutral white)
Peak luminous intensity	3100 cd
Beam angle	90 × 130°
Color rendering index (CRI)	Ra > 80
On/Off cycles	20000
Lifetime	30000 h
Useful luminous flux of the light source reference	in a wide cone (120°)
Chromaticity coordinates (x)	0.34
Chromaticity coordinates (y)	0.359
R9 colour rendering index value	>0

**INDEX: VLE-SLE14-505**

<b>The lumen maintenance factor</b>	≥96%
<b>Colour consistency in MacAdam ellipses (SDCM)</b>	<6 (6500K)
<b>Flicker metric (Pst LM)</b>	≤1
<b>Stroboscopic effect metric (SVM)</b>	outdoor use
<b>CRI Min</b>	Ra 80
<b>CRI Max</b>	Ra 88

**Additional information**

<b>Vertical adjustment range</b>	200°
<b>Place of installation</b>	Pillar, Wall
<b>Place of application</b>	outdoor
<b>Impact protection</b>	IK07
<b>Housing colour</b>	Gray
<b>Minimum distance from the illuminated object</b>	0.5 m
<b>Diffuser material</b>	Polycarbonate (PC)
<b>Operating temperature range</b>	-20° +50°C
<b>Suitable for installation in normally flammable surfaces</b>	yes
<b>Mercury content</b>	Does not contain
<b>Ingress protection</b>	IP65
<b>Housing material</b>	Aluminum alloy

**Dimensions**

<b>EAN</b>	5904405542293
<b>Height</b>	487 mm
<b>Depth</b>	88 mm

<b>Width</b>	151 mm
<b>In the package</b>	1 pc.
<b>Outer box</b>	10 pcs.

**Signs marking goods**
**Packaging marking**


Recycling of  
waste, CE,  
Utilization



# VIDEX®

## VIDEX-STREET-LED-LEYA-50W-NW5

### INDEX: VLE-SLE14-505

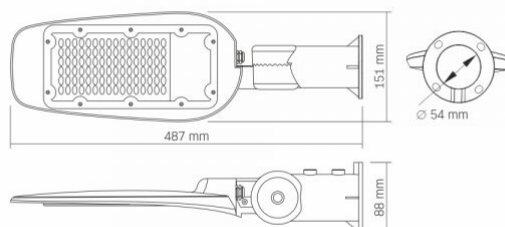

We reserve the right to make technical changes. The data contained in this material is not legally binding.

Allegro opt Sp. z o.o., ul. Mierzeja Wiślana 11,  
30-732 Krakow, Poland.



The product must be used outdoors



Minimum distance from the illuminated object



Protection against electric shock class I. A product in which the means of protection against electric shock, in addition to the main insulation, is an additional protective circuit connected to the grounding of the power supply network



The product can be installed and used in/on normally flammable surfaces



Waste recycling after the end of the product's service life



The product meets the requirements of EU directives



It is forbidden to throw away waste equipment marked with the symbol of a crossed-out bin with other waste



90°-130°

— Effective light beam angle



Ra > 80

— Ra > 80 - color rendering index



20 000

— Rated On/off cycles



IK07

— The product withstands a medium impact (e.g., from a blunt object)



30 000 h

— Nominal lifetime (hours)



Not Dimmable

— The product is incompatible with light regulators



-20°C +50°C

— Operating temperatures range



CCT 6500K

— Colour consistency in MacAdam ellipses (SDCM)



No Flicker

— The flickering of the light does not exceed the permissible level



Free

— The product does not contain mercury



IP65

— Class of protection against dust and moisture. The product has full protection against dust and water jets from all directions